

**RENOVATION Wranglers**  
 Owner: Renovation Wranglers  
 102 E 26th St  
 Bryan, TX 77803  
 kate@renovation.com | 979.450.9969

**ARCHITECTURE**  
 Architect of Record: UKB Architecture  
 2929 Allen Pkwy Suite 200  
 Houston, TX 77019  
 isa@ukbarchitecture.com | 713.425.3076

**DUDDLEY**  
 Structural: Dudley  
 Firm # 18677  
 6102 Imperial Loop Drive  
 College Station, TX 77845  
 corieka@dudleyeng.com | (979) 777-0720

**amc ENGINEERS**  
 MEP: AMC Engineers  
 Texas Firm #9441  
 508 E Jackson St # 552  
 Burnet, TX 78611  
 info@amcengineers.com | 512.535.6427

This project, like most OpeningDesign's projects, is open source. (Attribution-ShareAlike, 4.0 International-CC, BY-SA 4.0) - freely available to any party for future use, assuming the terms such as Attribution and ShareAlike are honored.


5/26/22, 11:28 AM iqluprospector.com\_en/profile\_XHEZ.F-C-1168 - Through-penetration Firestop Systems | UL Product IQ

**UL Product IQ®**

XHEZ.F-C-1168 - Through-penetration Firestop Systems

Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Certified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered Certified.

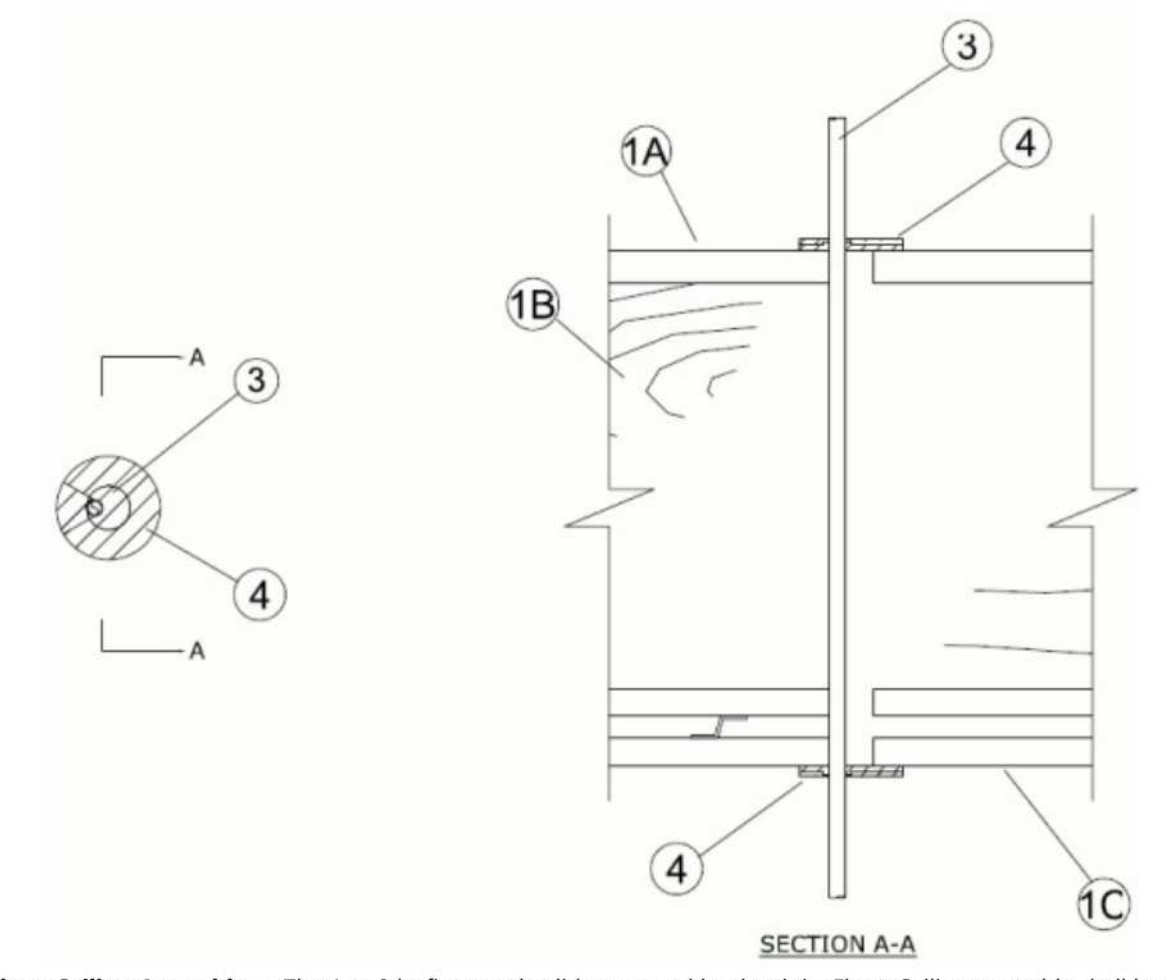

- Floor-Ceiling Assembly** — The 1 or 2 hr fire-rated solid or trussed lumber joist Floor-Ceiling assembly shall be constructed of the materials and in the manner specified in the individual L500 Series Floor-Ceiling Designs in the UL Fire Resistance Directory, as summarized below:
  - Flooring System** — Lumber or plywood subfloor with finish floor of lumber, plywood or **Floor Topping Mixture\*** as specified in the individual Floor-Ceiling Design. Opening may be round, rectangular or irregular with a max diam or dimension of 1 in. (25 mm).
  - Joists** — Nom 10 in. (254 mm) deep (or deeper) lumber, steel or combination lumber and steel joists, trusses or **Structural Wood Members\*** with bridging as required and with ends firestopped.
  - Gypsum Board\*** — Nom 4 ft (122 cm) wide by 5/8 in. (16 mm) thick. Gypsum board direct-attached to joists or screw-attached to furring channels as specified in the individual Floor-Ceiling Design. Opening may be round, rectangular or irregular with a max diam or dimension of 1 in. (25 mm).
- The F, FT, FH and FTH Rating of the firestop system is equal to the rating of the floor-ceiling assembly.**
- Chase Wall** — (Optional, Not Shown) — The through penetrants (Item 3) may be routed through a fire-rated or non-rated single, double or staggered wood stud/gypsum board chase wall constructed of the materials and Partition design in the UL Fire Resistance Directory and shall include the following construction features:
  - Studs** — Nom 2 by 4 in. (51 by 102 mm), 2 by 6 in. (51 by 152 mm) or 2 by 8 in. (51 by 203 mm) lumber studs.
  - Sole Plate** — Nom 2 by 4 in. (51 by 102 mm), 2 by 6 in. (51 by 152 mm) or 2 by 8 in. (51 by 203 mm) lumber plates. Opening to be centered in sole plate. Opening may be round, rectangular or irregular with a max diam or dimension of 1 in. (25 mm).
  - Top Plate** — The double top plate shall consist of two nom 2 by 4 in. (51 by 102 mm), 2 by 6 in. (51 by 152 mm) or 2 by 8 in. (51 by 203 mm) lumber. Opening to be centered in top plate. Opening may be round, rectangular or irregular with a max diam or dimension of 1 in. (25 mm).

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

Last Updated on 2020-04-29

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2022 UL LLC"

XHEZ - Through-penetration Firestop Systems  
 XHEZ7 - Through-penetration Firestop Systems Certified for Canada

See General Information for Through-penetration Firestop Systems  
 See General Information for Through-penetration Firestop Systems Certified for Canada

**System No. F-C-1168**  
 April 29, 2020

ANSI/UL1479 (ASTM E814)	CAN/ULC 5115
F Ratings — 1 and 2 Hr (See Item 1)	F Ratings — 1 and 2 Hr (See Item 1)
T Ratings — 1 and 2 Hr (See Item 1)	FT Ratings — 1 and 2 Hr (See Item 1)
L Rating at Ambient — Less than 1 CFM/Opening	FH Ratings — 1 and 2 Hr (See Item 1)
L Rating at 400 F — Less than 1 CFM/Opening	FTH Ratings — 1 and 2 Hr (See Item 1)
	L Rating at Ambient — Less than 1 CFM/Opening
	L Rating at 400 F — Less than 1 CFM/Opening

https://iqluprospector.com/en/profile?e=175143 1/3 https://iqluprospector.com/en/profile?e=175143 2/3 https://iqluprospector.com/en/profile?e=175143 3/3

6C A615 FIRE STOP - FLOOR - FRAMED - METALLIC PIPE, CONDUIT OR TUBING - F\_1HR&2HR - T\_1HR&2HR - L\_NA - HILTI - XHEZ.F-C-1168  
 12" = 1'-0"


5/26/22, 11:25 AM iqluprospector.com\_en/profile\_XHEZ.F-C-2030 - Through-penetration Firestop Systems | UL Product IQ

**UL Product IQ®**

XHEZ.F-C-2030 - Through-penetration Firestop Systems

Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Certified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered Certified.

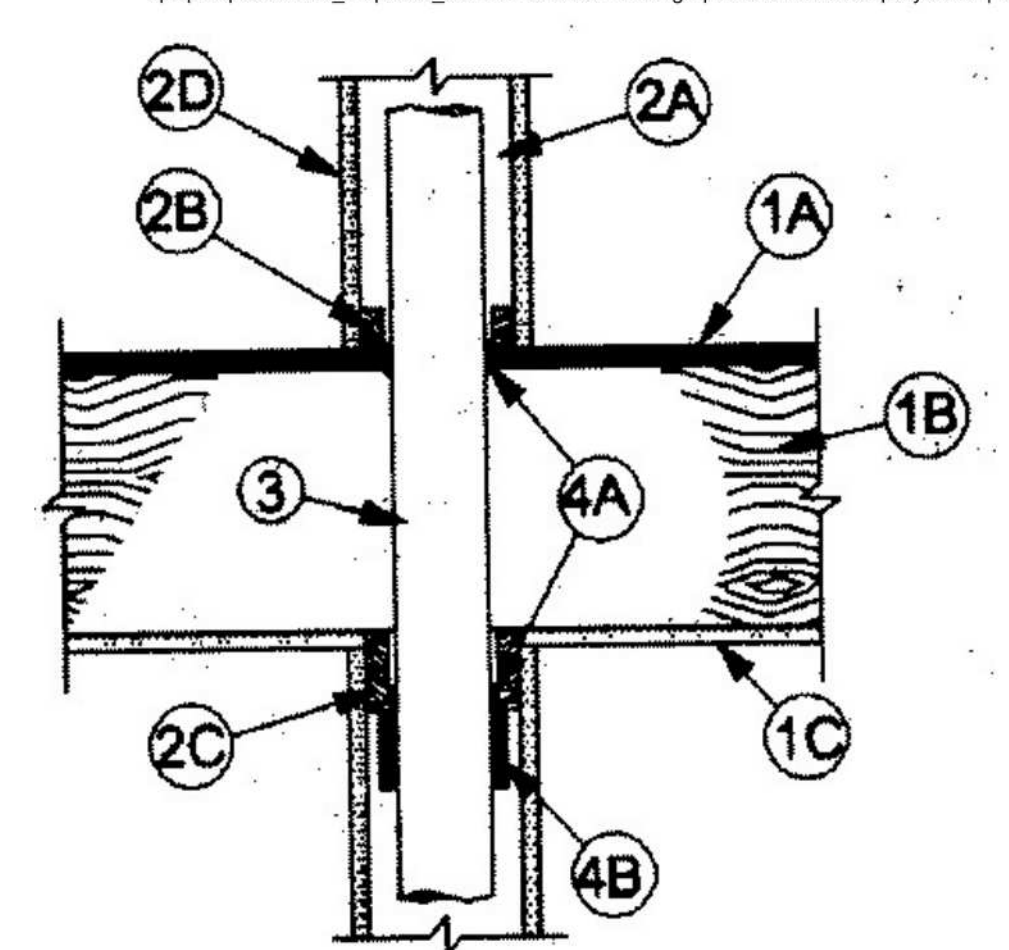

- System tested with a pressure differential of 2.5 Pa between the exposed and the unexposed surfaces with the higher pressure on the exposed side.**
- Floor-Ceiling Assembly** — The 1 or 2 hr fire-rated solid or trussed lumber joist floor-ceiling assembly shall be constructed of the materials and in the manner specified in the individual L500 Series Floor-Ceiling Designs in the UL Fire Resistance Directory. **The F Rating of the firestop system is equal to the rating of the floor-ceiling and wall assemblies.** The general construction features of the floor-ceiling assembly are summarized below:
    - Flooring System** — Lumber or plywood subfloor with finish floor of lumber, plywood or **Floor Topping Mixture\*** as specified in the individual Floor-Ceiling Design. Diam of opening shall be 1 in. (25 mm) larger than the nom diam of through-penetrant (Item 3).
    - Joists** — Nom 10 in. (254 mm) deep (or deeper) lumber, steel or combination lumber and steel joists, trusses or **Structural Wood Members\*** with bridging as required and with ends firestopped.
    - Gypsum Board\*** — Thickness, type, number of layers and fasteners shall be as specified in the individual Floor-Ceiling Design. Diam of opening shall be 1 in. (25 mm) larger than the nom diam of through-penetrant (Item 3).
    - Furring Channels** — (Not Shown) (As required) - Resilient galvanized steel furring installed in accordance with the manner specified in the individual L500 Series Designs in the Fire Resistance Directory.
  - Chase Wall** — (Optional) - The through penetrant (Item 3) may be routed through a fire-rated or non-rated single, double or staggered wood stud/gypsum wallboard chase wall. The chase wall shall be constructed to include the following construction features:
    - Studs** — Nom 2 by 6 in. (51 by 152 mm) or double nom 2 by 4 in. (51 by 102 mm) lumber studs.
    - Sole Plate** — Nom 2 by 6 in. (51 by 152 mm) (or larger) or parallel 2 by 4 in. (51 by 102 mm) lumber plates, tightly butted. Diam of opening shall be 1 in. (25 mm) larger than the nom diam of through-penetrant (Item 3).

- Top Plate** — The double top plate shall consist of two nom 2 by 6 in. (51 by 152 mm) (or larger) or parallel 2 by 4 in. (51 by 102 mm) lumber plates, tightly butted. Diam of opening shall be 1 in. (25 mm) larger than the nom diam of through-penetrant (Item 3).
- Gypsum Board\*** — One or two layers of min 1/2 in. (13 mm) gypsum board.
- Through-Penetrants** — One nom 1-1/2 in. (38 mm), 2 in. (51 mm), 3 in. (76 mm) or 4 in. (102 mm) diam nonmetallic pipe to be installed within the firestop system. Diam of opening through flooring system and through sole and top plates of chase wall to be max 2-1/8 in. (64 mm), 2-5/8 in. (67 mm), 4 in. (102 mm) or 5 in. (127 mm) for nom 1-1/2 in. (38 mm), 2 in. (51 mm), 3 in. (76 mm) or 4 in. (102 mm) diam nonmetallic pipe sizes, respectively. Pipe to be rigidly supported on both sides of the floor-ceiling assembly. The T Rating is dependent on the size of the through-penetrant. For 2 hr rated assemblies, the T Rating is 2 hr for 1-1/2 in. (38 mm) diam (and smaller) pipes and 1-1/2 hr for pipes greater than 1-1/2 in. (38 mm) diam. For 1 hr rated assemblies, the T Rating is 1 hr for 1-1/2 in. (38 mm) diam (and smaller) pipes, 3/4 hr for 2 in. (51 mm) diam pipes and 0 hr for pipes greater than 2 in. (51 mm) diam. The following types of nonmetallic pipes may be used:
  - Polyvinyl Chloride (PVC) Pipe** — Schedule 40 solid-core or cellular core PVC pipe for use in closed (process or supply) or vented (drain, waste or vent) piping system.
  - Chlorinated Polyvinyl Chloride (CPVC) Pipe** — SDR17 CPVC pipe for use in closed (process or supply) or vented (drain, waste or vent) piping systems.
  - Acrylonitrile Butadiene Styrene (ABS) pipe** — Schedule 40 solid-core or cellular core ABS pipe for use in closed (process or supply) or vented (drain, waste or vent) piping systems.
  - Flame Retardant Polypropylene (FRPP) Pipe** — Schedule 40 FRPP pipe for use in closed (process or supply) or vented (drain, waste or vent) piping system.
- Firestop System** — The details of the firestop system shall be as follows:
  - Fill, Void or Cavity Material\*** — **Sealant** — Min 3/4 in. (19 mm) thickness of fill material to be installed within the annular space between the pipe and the flooring (Item 1A) or sole plate. Min 5/8 in. (16 mm) thickness applied within the annular space, flush with the bottom surface of ceiling or lower top plate. **HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC. — FS-ONE Sealant FS-ONE MAX Intumescent Sealant.**
  - Firestop Device\*** — **Firestop Collar** — Firestop collar shall be installed in accordance with the accompanying installation instructions. Collar to be installed and latched around the pipe and secured to underside of ceiling or chase wall top plate (Item 2C) using the anchor hooks provided with the collar. (Minimum 2 anchor hooks for 1-1/2 (38 mm) and 2 in. (51 mm) diam pipes and 3 anchor hooks for 3 in. (76 mm) diam pipes). The anchor hooks are to be secured to the ceiling with min 3/16 in. (5 mm) diam steel toggler bolts or to the chase wall top plate with min No. 12 by min 1 in. (25 mm) long steel wood screws in conjunction with steel washers. **HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC. — CP 643 50/1.5"N, CP643 63/2"N, CP 643 90/3"N or CP643 110/4"N Firestop Collar**

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

Last Updated on 2018-04-06

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

XHEZ - Through-penetration Firestop Systems

See General Information for Through-penetration Firestop Systems

**System No. F-C-2030**  
 April 06, 2018

**F Ratings — 1 and 2 Hr (See tem 1)**  
**T Ratings — 0, 3/4, 1, 1-1/2 and 2 Hr (See Item 3)**

https://iqluprospector.com/en/profile?e=175154 1/4 https://iqluprospector.com/en/profile?e=175154 2/4 https://iqluprospector.com/en/profile?e=175154 3/4 https://iqluprospector.com/en/profile?e=175154 4/4

6A A615 FIRE STOP - FLOOR - FRAMED - NONMETALLIC PIPE CONDUIT TUBING - F\_1HR&2HR - T\_1HR&2HR - L\_NA - HILTI - XHEZ.F-C-2030  
 12" = 1'-0"

Date	Description
08/10/2022	Issued for Permit
08/26/2022	Permit Revisions

**openingdesign**  
 Architect: OpeningDesign  
 17 S Fairchild | FL 7  
 Madison, WI 53703  
 ryan@openingdesign.com | 773.425.6456

**A615**